

ProLine FC 20 is equipped with uniquely designed hangers, to dry the garment from both the inside and the outside. The construction of the hangers dries PPE very fast.

Main Data	FC 20
Capacity, kg (lbs)	20 (44)
Capacity, complete fire suits	6
Heating effect, kW	12
Part no	131035
Consumption data, normal temperature*	
Drying time, min	166
Energy consumption, kWh	19,6
Drying capacity, g/min (oz/min)	55 (1,9)

*Drying of 6 heavy duty garments with membrane (dry weight 20 kg), washed and high-pinned to 50% residual moisture, dried to 4% residual moisture.

FC 20

Drying Cabinet for Protective Garments

ProLine FC 20 is a drying cabinet with a capacity of 20 kg (44 lbs). The drying programmes are developed especially to dry personal protective equipment.

ProLine FC 20 is equipped with uniquely designed hangers, to dry the garment from both the inside and the outside. The construction of the hangers dries PPE very fast.

The drying process has no mechanical action which extends the lifetime and durability of the PPE. ProLine FC 20 has optional hangers to dry boots and gloves etc. that can be changed in a matter of seconds.

Details

- Drying capacity of 6 large uniforms/20 kg (44 lbs)
- HTS - stops the drying process when the laundry is dry
- Adjustable programmes
- Removable hangers for easier work flow
- Drying procedure activates the impregnation
- The doors can be opened 190°
- Double overheating protection
- Light inside the cabinet
- Removable top for easier installation and service
- Language options: Swedish, Norwegian, Danish, English, French, German and Spanish
- Delivered as flat-pack to save shipping costs

About PODAB


PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

Contact us

PODAB's head office, warehouse, workshop and export department are situated in Gothenburg, Sweden. If you have any questions, please feel free to contact us at +46 31-752 01 00. You can also read more about us at www.podab.com.

Drying Cabinet		FC 20
Standard electrical connections	Phase/Voltage/Frequency	3~N/400V/50Hz
	Total effect, kW	12,5
	Fuse, A	20
	Cable length, mm (inch)	2500 (98,4)
Optional electrical connections	Phase/Voltage/Frequency/Effect/Fuse	3~/230V/50-60Hz/12,5kW/32A
	Phase/Voltage/Frequency/Effect/Fuse	3~/440V/50-60Hz/12,5kW/20A
	Phase/Voltage/Frequency/Effect/Fuse	3~/480V/50-60Hz/12,5kW/16A
Air connections	Outlet exhaust, \varnothing mm (inch)	160
	Outlet air flow, m ³ /h* (ft ³ /h*)	300 (10594)
	Pressure drop, max Pa* (psf*)	210 (4,39)
Optional extras	Hook rack, set of three, part no	131071
	Rack for boots, part no	131009
	Rack for gloves, part no	131008
	Air exchanger 1 vent., part no	141009
	Air exchanger 2 vent., part no	141018
Sound level	Airborne sound level, dB(A)	65
Weight	Net, kg (lbs)	200 (441)
	Shipping data net, kg (lbs)	240 (529)
Minimum ceiling height	Minimum ceiling height, mm (inch)	2215 (87,2)
Shipping dimensions	WxDxH packed, mm (inch)	1915x790x1060 (75,4x31,1x41,7)

* Recommended air flow.

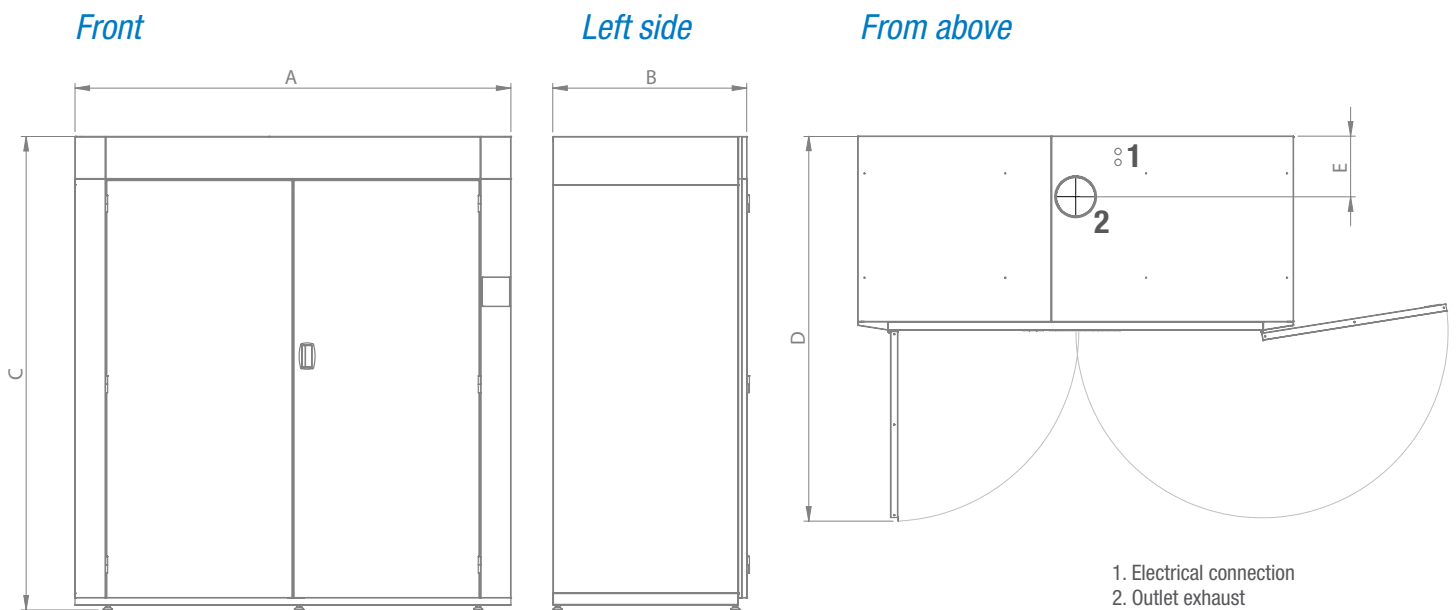

Dimensions in mm (inch)	A	B	C	D	E
	Width	Depth	Height	Depth with door	Exhaust position from back
FC 20	1800 (71)	800 (31,5)	1955 (77)	1590 (62,6)	250 (9,84)



2019-10-14 Changes can be made without prior notice.