



TS 4 E/VP

Compact Drying Cabinets

TS 4 and TS 4 VP are excellent drying cabinets, perfect for rooms where space is limited. The cabinets are 60 cm (23,4 inches) wide and holds 4 kg (8,8 lbs) of laundry. They are equipped with an extendible hanging system which simplifies the laundry operation.

Drying cabinets are great complements to tumble dryers since they dry without any mechanical action. In TS 4 E all controls and electrical components are placed in a pull-out fan package which makes it easy to repair and maintain. TS 4 VP uses heat pump technology for an even more efficient and gentle drying.

Details

- Capacity 4 kg (8,8 lbs)
- Hanging length 16 m (52,5 ft)
- Energy consumption 2,5 resp. 1,2 kWh
- Compact design
- Control panel with LCD
- Two humidity controlled automatic programs
- Timed drying - TS 4 E
- Extendible hanging system
- The door can be ordered right or left handed
- Overheat protection
- Baskets as optional extra
- Hook rack as optional extra
- Touch buttons - TS 4 VP
- 5 selectable languages - TS 4 VP
- Timer controlled as optional extra - TS 4 E
- Reduced height as optional extra - TS 4 E

Main Data	TS 4 E	TS 4 VP
Capacity, kg/lbs	4 (8,8)	4 (8,8)
Hanging length, m (ft)	16 (52,5)	16 (52,5)
Heating effect, kW	1,5	-
Part no	131041	131040
Consumption data, normal temperature		
Drying time, min	120	90
Energy consumption, kWh*	2,5	1,2

*Drying of 4 kg (8,8 lbs) cotton (dry weight) washed and high-spinned.

About PODAB


PODAB is a Swedish company that has been in the laundry business since 1945. We develop, manufacture and market quality products at competitive prices for multiple apartment buildings, laundry rooms and for professional use.

Contact us


PODAB's head office, warehouse, workshop and export department are situated in Gothenburg, Sweden. If you have any questions, please feel free to contact us at +46 31-752 01 00. You can also read more about us at www.podab.com.

Drying Cabinet		TS 4 E	TS 4 VP
Electrical connections	Phase/Voltage/Frequency	1~N/230V/50-60Hz	1~N/230V/50-60Hz
	Total effect, kW	1,54	0,9
	Fuse, A	10	10
	Cable length, mm (inch)	2000 (78,7)	2500 (98,4)
Air connections	Outlet exhaust, Ø mm (inch)	100 (3,93)	-
	Outlet air flow, m³/h (ft³/h)	45 (1589)	-
Heat pump	Condensate pipe, Ø mm (inch)	-	13 (1/2)
	Refrigerant	-	R407C
	Amount of refrigerant, g (oz)	-	300 (10,6)
Optional extras	Air exchanger 1 vent., part no	141009	-
	Air exchanger 2 vent., part no	141018	-
	Timer controlled, part no	131001	-
	Reduced height, part no	131042	-
	Timer controlled and reduced height, part no	131043	-
Sound level	Airborne sound level, dB(A)	60	52
Weight	Net, kg (lbs)	61 (134)	95 (209)
	Shipping data net, kg (lbs)	65 (143)	100 (220)


Front

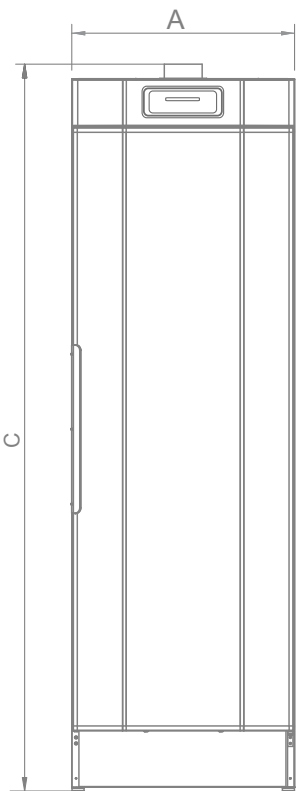

Left Side

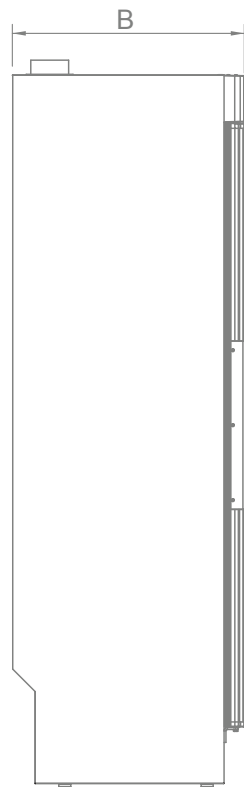

Rear Side



Dimensions, mm (inch)	A	B	C	D
	Width	Depth	Height	Reduced Height
				Exhaust position from back
TS 4 E	595 (23,4)	619 (24,4)	1939 (76,3)	1739 (68,5)
TS 4 VP	595 (23,4)	675 (26,6)	1925 (75,8)	-



2017-10-04. Changes can be made without prior notice.