


# Single bar TS43 E

1. Top rack needs to be removed to install the single bar.
2. Use a flat head screwdriver to carefully remove the two grey stoppers attached to the fixed rails on each side of the top rack. Place the flat head of the screwdriver at the bottom of the grey stopper to gently pull the stopper out from the rail.  
**CAUTION:** The stopper can come off quickly, cover it with your hand to prevent any potential injuries.



3. Carefully remove the top rack by pulling it towards you. Ensure that the cabinet door is fully open before proceeding with this action.
4. Position the single bar with caution into the fixed rails, ensuring that the arrows point towards the back wall of the cabinet. Push the single bar all the way in. Bend and adjust the highlighted flanges of the single bar slightly towards the side rails to secure the single bar in place.

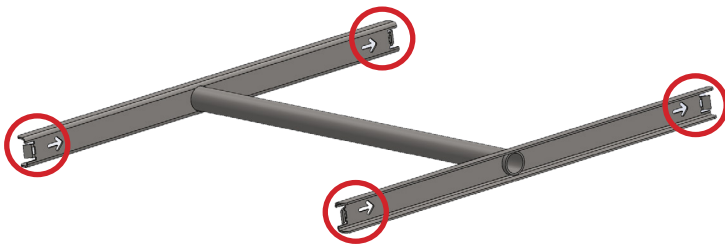

5. After positioning it, carefully reattach the grey stoppers by pressing them back into their place. This ensures that the single bar remains extra secure during use.

