

Modern laundry equipment

Revolutionize your laundry routine with innovative drying cabinets, ensuring quick and gentle drying for your textiles and PPE



2025

An aerial photograph of a vast, dense evergreen forest. The trees are a deep, vibrant green, creating a textured canopy. On the right side of the image, a dark asphalt road with white lane markings curves through the forest. The text "Longevity is the ultimate sustainability" is overlaid in a clean, white, sans-serif font on the left side of the image.

Longevity
is the
ultimate
sustainability

- 
- 04. Innovators in laundry for 80 years
 - 06. Why choose PODAB
 - 09. Redefining laundry
 - 11. Firefighters safety
 - 12. Product range
 - 28. Technical specifications
 - 34. Contact us

FAMILY BUSINESS WITH PASSION

Innovators in laundry solutions for 80 years

Since 1945, we have been dedicated to providing laundry solutions that combine high quality, sustainability, and innovation. Our vision is to create efficient and reliable laundry solutions.



THE COMPANY IS FOUNDED

PODAB is founded by three entrepreneurs – Pettersson, Olsson, and Dahlin – with a shared goal: to create exceptional laundry solutions. From the very beginning, this focus has been at the heart of everything we do, shaping our journey and defining our purpose.

—1945.— 1950.—

INNOVATION AND GROWTH

Washing machines gain popularity, and PODAB develops modern, reliable machines. The company also manufactures other equipment, expanding its focus.



A NEW ERA BEGINS

Carl Johan Sellberg acquires PODAB. He lays the foundation for today's focus on professional laundry equipment and exceptional customer care.

1963.

1970.

CHANGES

After establishing a new factory, PODAB faces market challenges. The company adapts by emphasizing reselling as part of its strategy moving forward.

PARTNERSHIPS AND GROWTH

In 1985, PODAB begins selling IPSO machines. Under Robert Sellberg's leadership, the company grows and re-establishes a complete laundry product range.

1988.

1990.

FOCUSING ON EXPERTISE

The company develops its own products, such as drying cabinets, and grows nationwide. Strong customer relationships become a key part of its success.

2000.

EXPANSION, QUALITY, AND GLOBAL DEVELOPMENT

PODAB expands its range with Swiss products and in-house solutions. Under Jimmy Nilsson's leadership in 2010, the company undergoes restructuring to focus on ISO certification, and sustainable product development, strengthening customer satisfaction and the brand.

2025.

80TH ANNIVERSARY AND FUTURE VISIONS

In 2025, PODAB celebrates 80 years as a leader in laundry solutions. The focus is on global expansion and product development. PODAB also deepens its commitment to sustainability and quality to meet future demands and continue delivering premium products.



Why
choose
PODAB



Leading the way in sustainable laundry solutions

PODAB's commitment to environmental responsibility is seamlessly integrated into the design and functionality of our drying cabinets. PODAB is at the forefront of creating sustainable products that not only enhance your laundry routine but also contribute to a greener future.

We are proud to share that our manufacturing plants are quality ISO 9001 and environmentally ISO 14001 certified.

Extend the lifespan of your textiles

ProLine drying cabinets utilize efficient heat and air circulation to gently hang dry textiles and PPE, without the use of mechanical moving parts. This gentle drying method significantly extends the lifespan of your textiles. PODAB studies show a 64% higher wear and tear in textiles dried with mechanical action compared to those dried without it.

Intelligent humidity and temperature tracking

Our drying programs automatically halt when your items reach the perfect dryness, preventing unnecessary energy consumption and over-drying. This not only saves energy but also extends the life of your textiles and PPE, aligning with our commitment to sustainable practices.

Designed to last

PODAB's ProLine drying cabinets redefine textile care with a 20+ year life expectancy. Rigorously tested for longevity, these cabinets seamlessly blend efficiency and user-centric design. Incorporating state-of-the-art technology, these systems elevate the drying experience by providing a sustainable solution for dependable care of textiles and gear across various industries.

Smart air circulation system

At PODAB, we prioritize energy conservation through the implementation of a smart air circulation system in our drying cabinets. This innovative design intelligently reuses existing air within the cabinet, minimizing the need for new air and, in turn, conserving energy. By embracing this approach, we also enhance the overall effectiveness of the drying cycle.



Cutting-edge
technology



EMBRACING SUSTAINABILITY

Redefining Laundry

PODAB is dedicated to developing cutting-edge solutions for diverse industries, as seen in our meticulously crafted drying cabinets. These cabinets represent a shift towards energy-efficient solutions with a focus on minimizing environmental impact. Our commitment extends beyond mere appliances, embodying a vision of sustainability and responsible technology. By reducing energy consumption without compromising efficiency, we contribute to a greener, more secure future.

Addressing the specific needs of textiles and PPE, our drying cabinets provide a gentle yet thorough drying process, extending the lifespan of materials. This approach aligns with our commitment to fostering sustainable practices and cost-effectiveness. Beyond product practicality, we aim to enhance customer experiences by offering intuitive, user-friendly solutions integrated into daily operations. This allows our customers to focus on what matters most, confident that their textiles and PPE are cared for sustainably and securely.

At PODAB, our pursuit of excellence permeates every facet, from research and development to customer service. When choosing PODAB, you're not just investing in a product - you're investing in excellence, innovation, and uncompromising quality.



Elevate your
equestrian
gear care

Ensure a safer workplace for our firefighters

Our drying cabinets are designed with intensive research, experienced engineers, and innovative solutions to create a safer workplace for our professionals.



In our unwavering commitment to firefighter safety and well-being, adopting a fresh perspective on improving their work environment is essential. PODAB drying cabinets stand out as beacons of progress, designed to prioritize firefighters' safety by significantly reducing health risks associated with damp gear. The FC20 does not only meet but exceed requirements, extending the lifespan of protective suits while minimizing wear and tear. This approach not only enhances firefighter safety but also maximizes resource efficiency.

The innovative features of PODAB drying cabinets represent a paradigm shift in firefighter safety, highlighting the responsibility to invest in cutting-edge solutions. This commitment contributes to a safer future for firefighters and their families, demonstrating our gratitude for their unwavering dedication to community protection.

Energy-efficient and gentle drying cabinets with innovative technology

PODAB's drying cabinets are equipped with advanced features such as the Humidity Tracking System (HTS), ensuring energy efficiency and quick drying, even for high laundry demands.

LARGE CAPACITY OF 73 CU FT

EASY-TO-USE DISPLAY



Compact design, maximum efficiency

ProLine TS43 E & TS4 HP

- Retractable hanging system
- Automatic & manual programs
- Temperature tracking system
- Energy-efficient
- Electric heated air drying
- Overheat backup
- Sturdy construction ensures durability and reliability
- Versatile drying options for added convenience
- Capacity, 2 complete PPE suits
- Ideal for delicate and hard to dry textiles and accessories
- Program ends with `cool down` mode



Main data TS43 E	Imperial	Metric	
Product no.		131043	
Interior capacity	cu ft	18.45	L 522
Capacity (dry weight)	lb	13.2	kg 6
Total hanging length	ft	53	m 16
Energy consumption	kWh	2.3 (ECO)	

Main data TS4 HP	Imperial	Metric	
Product no.		131040	
Interior capacity	cu ft	18.45	L 522
Capacity (dry weight)	lb	8.8	kg 4
Total hanging length	ft	53	m 16
Energy consumption	kWh	1.2	

Sustainable choice 

3 years limited warranty 



Effortless operation

Featuring a retractable hanging system, the TS43 E and TS4 HP streamline laundry operations, providing effortless drying for various textiles. The customizable interior, including ventilated shelving designed for PPE, ensures both efficiency and safety in the drying process.



Versatile capacity

Despite their smaller size, the TS43 E and TS4 HP boast an impressive capacity, capable of holding up to 13.2 lbs (6 kg) of laundry or accommodating 2 sets of PPE. This drying cabinet is versatile enough to meet a variety of drying needs.




TS43 E
Evacuation



TS4 HP
Heat pump

SUSTAINABLE
CHOICE

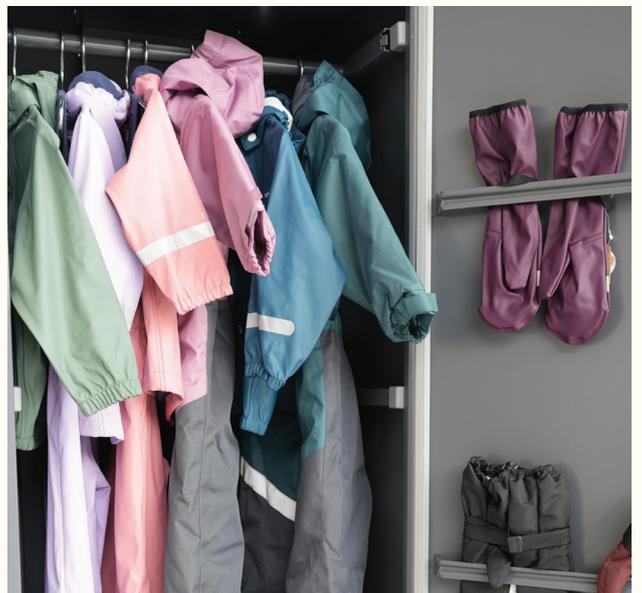

Smart drying with precision and flexibility

ProLine TS63 E & TS63 HP

- Automatic & manual programs
- Preset start time
- Temperature & humidity tracking system
- Energy-efficient
- Electric heated air drying
- Hanging rail rotates out 180° and doors open 190°
- Gentle drying technology without mechanical action
- Double overheat protection
- Powder coated galvanized steel
- Program ends with 'cool down' mode
- Interior lighting
- Sturdy construction ensures durability and reliability
- Versatile drying options for added convenience
- Ideal for delicate and hard to dry textiles and accessories



Versatile drying solutions for every industry

Main data TS63 E	Imperial		Metric	
Product no.		131090		
Interior capacity	cu ft	34.7	L	983
Capacity (dry weight)	lb	18	kg	8
Total hanging length	ft	53	m	16
Energy consumption	kWh	3.0		

Main data TS63 HP	Imperial		Metric	
Product no.		131091		
Interior capacity	cu ft	34.7	L	983
Capacity (dry weight)	lb	18	kg	8
Total hanging length	ft	53	m	16
Energy consumption	kWh	1.7		

HTS - Humidity Tracking System 

Sustainable choice 

3 years limited warranty 




Gentle drying technology

The ProLine TS63 E and TS63 HP drying cabinets, an innovative and energy-efficient option designed to dry textiles with care. Utilizing a gentle drying process without mechanical action, making them perfect for delicate or hard to dry garments that should not be tumble dried. Eliminate any concerns regarding damaging your fabrics, the TS63 E and TS63 HP drying cabinets offer a safe and effective alternative.



Versatile drying options

The ProLine TS63 E and TS63 HP can be equipped with a swinging rail system for easy access, customized with a single bar for standard hangers, or equipped with ventilated shelves for drying accessories that cannot be hung. This versatility ensures maximum flexibility to suit your specific drying needs.

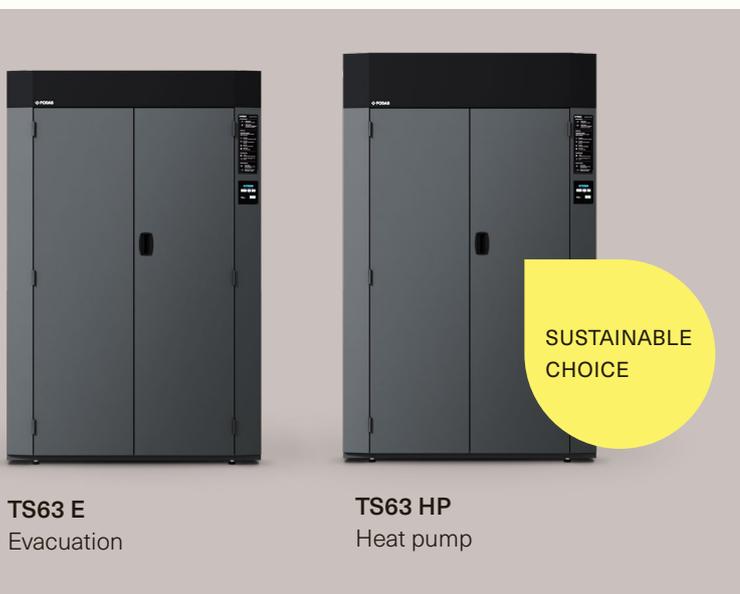

Efficient drying with large capacity

ProLine TS93 E

- Automatic & manual programs
- Preset start time
- Temperature & humidity tracking system
- Energy-efficient
- Electric heated air drying
- Hanging rail rotates out 90° and doors open 190°
- Gentle drying without mechanical action
- Double overheat protection
- Powder coated galvanized steel
- Program ends with `cool down` mode
- Interior lighting
- Sturdy construction ensures durability and reliability
- Versatile hanging options for added convenience
- Ideal for delicate and hard to dry textiles and accessories



Main data	Imperial		Metric	
Product no.		131092		
Interior capacity	cu ft	73	L	2070
Capacity (dry weight)	lb	40	kg	18
Total hanging length	ft	105	m	32
Energy consumption	kWh	≈ 6.4		

HTS - Humidity Tracking System 

Sustainable choice 

3 years limited warranty 



Unrivaled capacity

With the ability to accommodate up to 35 lbs / 16 kg of laundry in a single cycle, the ProLine TS93 E sets the standard for high-capacity drying cabinets. Its spacious interior and unique 100 ft / 32 m hanging length offer unparalleled flexibility, allowing for the efficient drying of a wide range of garments and textiles. The ProLine TS93 E is the ultimate solution for all your industrial drying needs.



Energy-efficient laundry operations

Despite its impressive capacity, the ProLine TS93 E is remarkably energy-efficient, consuming just 6.4 kWh per dry cycle. This not only reduces energy costs but also minimizes its environmental impact, making it a sustainable choice for any laundry operation.



Robust construction

Built to withstand the rigors of regular use, the ProLine TS93 E features a sturdy construction that ensures reliability and longevity. Its durable design makes it ideal for commercial dry cleaners, hotels, shared laundry spaces and industrial facilities where reliability is paramount.



Purpose-built design for protective gear

Expertly designed for PPE drying, this cabinet is perfect for demanding environments like fire departments, military operations, and the oil & gas industry, ensuring gear longevity and performance.

ProLine FC20

- Capacity, 6 complete PPE suits
- Automatic & manual programs
- Preset start time
- Temperature & humidity tracking system
- Energy-efficient
- Electric heated air drying
- Dual drying system for efficient and safe PPE drying
- Gentle drying without mechanical action
- Double overheat protection
- Powder coated galvanized steel
- Program ends with `cool down` mode
- 6 slots for interchangeable hangers with integrated airflows
- Interior lighting
- Versatile hanging options for added convenience



Extend the lifespan of your PPE with **64%**

Main data	Imperial	Metric
Product no.		131035
Interior capacity	cu ft 73	L 2070
Capacity (dry weight)	lb 44	kg 20
Capacity, sets of turnout gear	# 6	
Energy consumption	kWh 19.6	

HTS - Humidity Tracking System

Sustainable choice

3 years limited warranty



Purpose-built design for protective gear

The ProLine FC20 drying cabinet is meticulously crafted to cater to the drying needs of PPE. Designed specifically for environments such as fire departments, military operations, and oil & gas industries, this cabinet is an indispensable tool for ensuring the longevity and effectiveness of essential gear.



Versatile hanging options

Tailor your drying needs with interchangeable hangers designed for various types of equipment or accessories. This adaptability guarantees flexibility to accommodate the unique drying requirements of your industry.



Gentle, yet efficient drying

Experience thorough and safe drying without the need for mechanical action. Our gentle yet efficient drying process preserves the integrity of protective gear, ensuring it remains in top condition for optimal performance.



EFFECTIVELY DRYING PPE

Advanced personal protective equipment care

ProLine FC20 utilizes an advanced air circulation system that enables simultaneous inside-out drying, ensuring maximum efficiency and safety for personal protective equipment (PPE). The dual drying process involves distributing hot air through interchangeable hangers into the PPE and simultaneously circulating hot air within the cabinet, ensuring an energy-efficient and effective drying process. This system absorbs moisture from protective gear, promoting even air circulation within the cabinet, ensuring a secure drying process that extends the lifespan of the PPE.





Functionality for every laundry space

Laundry cart TP4

The TP4 laundry cart offers versatility and ergonomic design with smooth-gliding wheels and sturdy construction, ideal for any laundry space. Its corner safeguards ensure easy handling, reducing the risk of scratches on nearby equipment. Perfect for shared laundry facilities or commercial settings.

An easy-to-assemble laundry cart

Its self-supporting structure can be easily assembled in under a minute without tools or loose screws. The cart combines practicality with style, featuring a sleek black design and a sturdy chrome steel stand.



Main data	Imperial		Metric	
Product no.		161033		
Color		Chrome / Steel / Black		
Installation time	min	1		
Type		Rolling cart		
Shipping type		Flat packaging		
Width x depth x height	in	24 x 20.5 x 34.3	mm	610 x 520 x 872
Shipping: width x depth x height	in	42 x 28.7 x 2.8	mm	1070 x 730 x 70
Height to front edge cart	in	21	mm	535
Weight	lbs	16	kg	7.3
Shipping weight	lbs	20	kg	9







Drying cabinets are the ideal addition to any commercial or professional laundry room

Technical specifications

ProLine TS43 E

Mail data		Imperial		Metric	
Product No.			131043		
Type			Air vented		
Capacity (dry weight)	lb	13.2		kg	6
Hanging length	ft	53		m	16
Interior capacity	cu ft	18.45		L	522
Languages	#	10			
Programs	#	6			
Noise emission	dB(A)	55			
Door hanging			Right hanging		
Door reversing			Yes, possible		
Connection cable			Included		
Overheat protection			Standard		
Electrical connection					
Supply voltage	V	1~N/220-240V/50Hz			
Total effect	W	2000			
Protection	A	10			
Electrical cable length	in	94.5		mm	2400
Dimensions					
Outer: width x depth x height	in	23.4 x 25.2 x 76.3		mm	595 x 641 x 1939
Door opening	°	223			
Weight					
Weight	lb	≈132		kg	≈60
Ventilation					
Outlet exhaust	Ø in	3.93		mm	100
Outlet airflow	cfm	55.9		m ³ /h	95
Fan capacity	ft ³ /h	6356 ⁴¹ / ₆₄		m ³ /h	180
Consumption (normal temp.)					
Dry weight, cotton	lb	8.8		kg	4
Drying times	min	85			
Drying capacity	oz/min	0.8		g/min	25
Energy consumption	kWh	2.6			
Rest humidity, before drying	%	50			
Consumption (ECO program)					
Dry weight, cotton	lb	8.8		kg	4
Drying times	min	260			
Drying capacity	oz/min	0.3		g/min	7.7
Energy consumption	kWh	2.3			
Rest humidity, before drying	%	50			

CONSUMPTION DATA

The stated energy consumption represents the full program duration, tested with 100% cotton textiles at maximum capacity.

Updates and additional specifications are available at www.podab.com.

ProLine TS4 HP

Mail data	Imperial	Metric	
Product No.		131040	
Type		Heat pump	
Capacity (dry weight)	lb	8.8	kg 4
Hanging length	ft	53	m 16
Interior capacity	cu ft	18.45	L 522
Languages	#	10	
Programs	#	6	
Noise emission	dB(A)	52	
Door hanging		Right hanging	
Door reversing		Yes, possible	
Connection cable		Included	
Electrical connection			
Supply voltage	V	1~N/220-240V/50Hz	
Total effect	W	900	
Protection	A	10	
Electrical cable length	in	98.4	mm 2500
Dimensions			
Outer: width x depth x height	in	23.4 x 27 x 75.8	mm 595 x 688 x 1925
Door opening	°	180	
Weight			
Weight	lb	≈207	kg ≈94
Ventilation			
Outlet exhaust	Ø in	3.93	mm 100
Outlet airflow	cfm	55.9	m ³ /h 95
Fan capacity	ft ³ /h	6356 ⁴¹ / ₆₄	m ³ /h 180
Consumption (normal temp.)			
Dry weight, cotton	lb	8.8	kg 4
Drying times	min	90	
Drying capacity	oz/min	0.77	g/min 22
Energy consumption	kWh	1.2	
Rest humidity, before drying	%	50	
Water connection			
Drain pipe, outer	in	0.511	mm 13
Heat pump			
Refrigerant	type	R407C	
Refrigerant	oz	10.58	g 300

Technical specifications

ProLine TS63 E

Mail data	Imperial	Metric	
Product No.		131090	
Type		Air vented	
Hanging length (swinging hanging rail)	ft	52.5	m 16
Capacity (dry weight)	lb	18	kg 8
Interior capacity	cu ft	34.7	L 983
Drying capacity	oz/min	2.2	g/min 62
Energy consumption	kWh	3.0	
Drying time (normal temperature)	min	42	
Residual moisture before drying	%	43	
Residual moisture after drying	%	0	
Languages		8	
Noise emission	dB(A)	62	
Prepared for payment system		Standard	
Reversible swinging hanging rail system		Standard	
Connection cable		Included	
Electrical connection			
Supply voltage	V	3~N/400V/50Hz	
Electric heating	W	6000	
Electric fan	W	300	
Total effect	W	6300	
Protection	A	10	
Electrical cable length	in	98	mm 2500
Dimensions			
Outer: width x depth x height	in	47 x 25.2 x 74	mm 1200 x 640 x 1870
Door opening	°	190	
Lowest ceiling height in room	in	82	mm 2080
Weight			
Weight	lb	≈320	kg ≈145
Ventilation			
Outlet exhaust	Ø in	4.9	mm 125
Outlet airflow	cfm	135	m ³ /h 230
Pressure drop, max	psf	1.46	Pa 70
Maximum airflow (at 0% pressure)	cfm	200	m ³ /h 340

CONSUMPTION DATA

The stated energy consumption represents the full program duration, tested with 100% cotton textiles at maximum capacity.

Updates and additional specifications are available at www.podab.com.

ProLine TS63 HP

Mail data	Imperial	Metric	
Product No.		131091	
Type		Heat pump	
Hanging length (swinging hanging rail)	ft	52.5	m 16
Capacity (dry weight)	lb	18	kg 8
Interior capacity	cu ft	34.7	L 983
Drying capacity	oz/min	1.6	g/min 45
Energy consumption	kWh	1.7	
Drying time (normal temperature)	min	58	
Residual moisture before drying	%	43	
Residual moisture after drying	%	0	
Languages		8	
Noise emission	dB(A)	66	
Prepared for payment system		Standard	
Reversible swinging hanging rail system		Standard	
Connection cable		Included	
Electrical connection			
Supply voltage	V	3~N/400V/50Hz	
Total effect	W	1700	
Protection	A	10	
Electrical cable length	in	83	mm 2100
Dimensions			
Outer: width x depth x height	in	47 x 25.6 x 78.5	mm 1200 x 650 x 1995
Door opening	°	190	
Lowest ceiling height in room	in	81	mm 2050
Weight			
Weight	lb	≈392	kg ≈178
Water connection			
Drain pipe, outer	Ø in	1.02	mm 26
Drain pipe, inner	Ø in	0.78	mm 20
Heat pump			
Refrigerant	type	R407C	
Refrigerant	oz	39.68	g 1125

Technical specifications

ProLine TS93 E

Mail data	Imperial	Metric	
Product No.		131092	
Type		Air vented	
Hanging length (swinging hanging rail)	ft	105	m 32
Capacity (dry weight)	lb	35	kg 16
Interior capacity	cu ft	73,1	L 2070
Drying capacity	oz/min	2.9	g/min 81
Energy consumption	kWh	6.4	
Noise emission	dB(A)	65	
Drying time (normal temperature)	min	64	
Residual moisture before drying	%	43	
Residual moisture after drying	%	0	
Languages		8	
Connection cable		Standars	
Prepared for payment system		Standard	
Electrical connection			
Supply voltage	V	3~N/400V/50Hz	
Electric heating	W	9000	
Electric fan	W	500	
Total effect	W	9500	
Protection	A	16	
Dimensions			
Outer: width x depth x height	in	71 x 31.5 x 77	mm 1800 x 800 x 1955
Door opening	°	190	
Lowest ceiling height in room	in	67	mm 2215
Weight			
Weight	lb	≈518	kg ≈235
Ventilation			
Outlet exhaust	Ø in	2.36	mm 160
Outlet airflow	cfm	177	m³/h 300
Pressure drop, max	psf	4.4	Pa 210
Maximum airflow (at 0% pressure)	cfm	324	m³/h 550

CONSUMPTION DATA

The stated energy consumption represents the full program duration, tested with 100% cotton textiles at maximum capacity.

Updates and additional specifications are available at www.podab.com.

ProLine FC20

Mail data	Imperial	Metric	
Product No.		131035	
Type		Air vented	
Capacity, sets of suits/overalls	#	6	
Capacity (dry weight)	lb	44	kg 20
Interior capacity	cu ft	73.1	L 2070
Noise emission	dB(A)	65	
Electrical installation			
Supply voltage	V	3~N/400V/50Hz	
Electric heating	W	12000	
Electric fan	W	500	
Total effect	W	12500	
Protection	A	20	
Dimensions			
Outer: width x depth x height	in	71 x 31.5 x 77	mm 1800 x 800 x 1955
Door opening	°	190	
Lowest ceiling height in room	in	87	mm 2215
Weight			
Weight	lb	≈441	kg ≈ 200
Ventilation			
Outlet exhaust	Ø in	2.36	mm 160
Outlet airflow	cfm	177	m³/h 300
Pressure drop, max	psf	4.4	Pa 210
Maximum airflow (at 0% pressure)	cfm	353	m³/h 600
Drying 6 suits with membrane/liners			
Drying time	min	166	
Drying capacity	oz/min	2	g/min 55
Energy consumption	kWh	19.6	
Residual moisture before drying	%	70	
Residual moisture after drying	%	4	
Drying 6 suits without membrane/liners			
Drying time	min	85	
Drying capacity	oz/min	1.6	g/min 46
Energy consumption	kWh	6.8	
Residual moisture before drying	%	15	
Residual moisture after drying	%	0	

Get in touch

PODAB

export@podab.com
www.podab.com



Book your
product
consultation
today

Our experts

At PODAB, we're happy to engage with potential partners and build strong relationships with our customers. When you choose PODAB equipment, you're selecting top-tier quality and innovation but also top-tier support.

PRODUCT CONSULTATION

Together, we'll go through the PODAB equipment product range and explore how we can optimize operations within your business, ensuring the best possible results for your industry laundry needs.

SPARE PARTS SUPPORT

With original PODAB spare parts, you not only receive exceptional quality but also the assurance that they will remain accessible for your appliance, ensuring its longevity and performance over time.

Elevate your business by partnering with PODAB and offering premium laundry solutions.

Join our network of international distributors and partners. We strive to stay close to our customers, delivering reliability and quality through professional service, installation, and maintenance.

What to expect when becoming a PODAB Professional Partner

CUTTING-EDGE TECHNOLOGY

Gain exclusive access to advanced laundry equipment for efficient, durable, and outstanding performance.

DIVERSE PRODUCT RANGE

Explore a comprehensive lineup catering to various industries, including hotels, healthcare, and commercial laundries.

CUSTOMIZATION

We delight in partnering with you to customize our products to align with your brand. Our focus is on delivering quality solutions at competitive prices, tailored to meet your specific needs.

INDUSTRY-LEADING QUALITY

PODAB provides premium laundry solutions with robust equipment meticulously designed for heavy usage, ensuring exceptional results and longevity.

MARKETING AND SALES SUPPORT

Access a suite of marketing materials to effectively showcase PODAB's equipment and enhance your market presence.

CUSTOMER SATISFACTION GUARANTEE

Build trust with a satisfaction guarantee and reinforce confidence in your business.



80 years of experience, expertise, and innovation

Since 1945, we have been part of the development and innovation of professional laundry solutions, and today, we are one of the leading global suppliers of professional drying cabinets.



PODAB
export@podab.com
www.podab.com